

STANDARD 10 LED CONTROLLER

PWR - 3.6-7.4V [6V Optimal]


Top pin positive (+), bottom pin ground (-).

AUX -

Top pin ground (-), bottom pin AUX1-4 ground connection.

LED1-6 -

Constant ON, full-intensity.

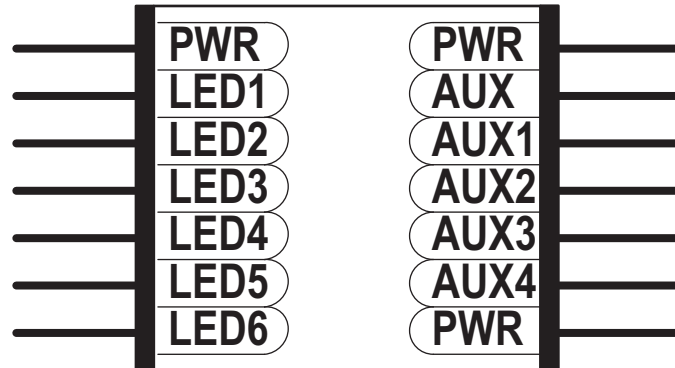

AUX1-4 -

If a jumper is installed on AUX; exactly the same as LED1-6; constant ON, full-intensity.

If no jumper is installed on AUX a ground connection must be made to AUX bottom pin to light AUX1-4; use a Remote Power Switch or Electronic Brake Switch.

DIMENSIONS - 1.15" X 0.75" X 0.25"

ALL LED CHANNELS

TOP PIN POSITIVE (+), BOTTOM PIN NEGATIVE (-)

30mA MAX PER CHANNEL (5MM OR 3MM LEDS ONLY)

DO NOT PLUG LEDs INTO AUX OR PWR CHANNELS

Controller pins can be directly soldered to for DIY projects.

Use heat shrink to insulate each pin.

RC-LIGHTS™